

OEM Replacement


STOCK OEM Replacement Hi-Density Cartridge Heaters — Underwater Pelletizer Die Heater

Design Features


- * Hi-Density Swaged Construction
- * 44" mica insulated 842°F (450°C) Lead Wires
- * 1" Diameter Heater Sheath
- * Incoloy Sheath Standard, SS Optional
- * 16 Gauge Stainless Steel Mounting Flange
- * Ground Lead Optional
- * Other Options Available (wattage, voltage, lead length etc.)

Type R2A Cement potting and silicone varnish




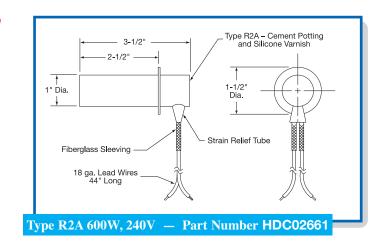

Type W1A Cement potting and silicone varnish



Type C3B Cement potting & silicone varnish, with stainless steel cable



Type C3D Welded lead end disc, with stainless steel cable



(800) 323-6859 • Email: sales@tempco.com