


Style RTD8 — Connection Head with 1/2" NPT Pipe Nipple

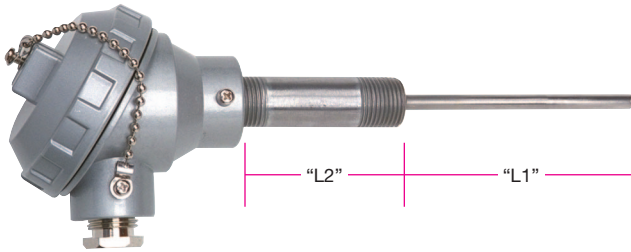

Two Construction Styles to Suit Any Application (See Ordering Code Box 11)

- * **Standard Industry Tube and Wire construction with fiberglass 900°F (482°C) or Teflon® 392°F (200°C) lead wires.**
- * **Mineral Insulated construction rated up to 1200°F (650°C). This construction type allows forming and bending the sheath to meet design requirements.**

Design Features

- * **Platinum Resistance Element.**
- * **Tempco's connection heads are gasketed to seal against moisture, dust and corrosive or hostile atmospheres.**
- * **Screw covers are attached to body with a plated chain.**
- * **Covers have lugs for tightening or loosening with a screwdriver or wrench.**
- * **Available in single or duplex.**
- * **Tempco's connection heads are available in die cast aluminum, Bakelite and cast iron in a variety of sizes from miniature for confined areas, to the large universal head designed for heavy process and industrial applications. See sensor accessories on pages 14-98 through 14-100 for complete information.**
- * **Pipe Nipple is galvanized.**

Ordering Information

RTDs are offered with the options listed in the worksheet below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

Ordering Code:

RTD8 - 1 2 3 4 5 6 7 8 9 10 11 12

Element BOX 1

S = 100Ω Single **K** = 1000Ω Single
D = 100Ω Dual **L** = 1000Ω Dual
TCR = .00385 ohm/ohm/°C

Sheath Length "L1" BOX 6

Whole inches
01 to **99**
 For lengths over 99 in. consult TEMPCO.

Sheath Length "L1" BOX 7

Fractional inches
0 = 0" **2** = 1/4" **4** = 1/2" **6** = 3/4"
1 = 1/8" **3** = 3/8" **5** = 5/8" **7** = 7/8"

Element Class BOX 2

A = ±0.06% at 0°C, Optional
B = ±0.12% at 0°C, Standard

"L2" 1/2" NPT Nipple Length BOX 8

Whole inches **03** to **18**
 For lengths over 18 in. consult TEMPCO.
 Standard Lengths **S1** = 1", **S2** = 2-1/2", **S3** = 5-1/2"

Number of Leads BOX 3

2 = 2-wire circuit
3 = 3-wire circuit
4 = 4-wire circuit (Dual circuit not available)
0.125" O.D. (Dual circuit not available)

Connection Head BOX 9

A = Standard Size Aluminum **P** = Polypropylene
B = Medium Size Aluminum **S** = Stainless Steel
C = Miniature Aluminum **E** = Explosion Proof (Aluminum)
H = Standard Cast Iron **T** = Explosion Proof (Stainless Steel)
F = Standard Bakelite
Note: Conduit connection for A, F, H & S is 1/2" (3/4" available);
 for B & C is 3/8"; and for P is 3/4" NPT.
 For overall dimensions see pages 14-98 through 14-100.

Sheath O.D. BOX 4

F = 0.125"
G = 0.188"
H = 0.250"

Spring-Loaded Probe BOX 10

O = Not Required
Y = Required

RTD Construction Type BOX 11

Standard Industry Construction
S = Fiberglass insulated 900°F (450°C)
T = Teflon® Insulated 392°F (200°C)

Mineral Insulated Construction

M = MgO Insulated 1200°F (650°C)
 (Type "M" not available for "K" or "L" from Element Box 1)

Special Requirements BOX 12

X = Specify
0 = None

Sheath Material BOX 5

B = 304 SS
C = 316 SS
A = Alloy 600
 (Type "M" Only; See Box 11)

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.